


ARC SERIES Architectural Speakers

A series of Speakers for every architectural aesthetic, structural & performance requirement. Clarity & reliability housed in compact forms that fit into tight spaces, corners & all the variables that contractors throw at us!


Most Arc speakers come with a voltage tap switch, and are accompanied with wall mounting brackets.

Now boldly offer solutions to cover the most demanding architectural requirement!

				
Technical Specifications	ARC 06	ARC 07	ARC 20	ARC 21
Speaker Type	Ceiling Mount	Ceiling Mount	Wall Mount	Column Speaker
Speaker Units	5" Woofer	6" Woofer	3" Woofer & 1" Tweeter	4 x 2" Woofer
Rated Power	6W	6W	20W	20W
Power Tap Selection	6W / 3W	6W / 3W	20W / 10W / 5W / 2.5W	20W / 10W
Frequency Response	125Hz-16KHz	100Hz-15KHz	90Hz-20KHz	230Hz-16KHz
Input Voltage (Max)	100V	100V	100V	100V
Sensitivity	91±3dB (1W,1M)	93±3dB (1W,1M)	85±3dB (1W, 1M)	87±3dB (1W, 1M)
Cabinet Material	ABS	ABS	ABS	ABS
Dimensions (WxDxH) mm	239x269x121	Φ 188 x 76	112x122x193	71x79x400
Net Weight	0.9 Kg	0.7 Kg	1.5 Kg	1.7 Kg
Colour	White	White	Black/White	Black/White

				
Technical Specifications	ARC 30	ARC 31	ARC 40	ARC 41
Speaker Type	Wall Mount	Book Shelf	Wall Mount	Wall Mount
Speaker Units	5" Woofer & 1" Tweeter	5" Woofer & 1" Tweeter	6" Woofer & 1" Tweeter	6.5" Woofer & 1" Tweeter
Rated Power	30W	30W	40W	40W
Power Tap Selection	30W / 15W / 7.5W	30W / 15W / 7.5W /	40W / 20W / 10W / 5W	-
Switch	/ 3.75W, 8 O	3.75W, 8 O	8 O	
Frequency Response	130Hz-20KHz	100Hz-20KHz	90Hz-20KHz	100Hz-20KHz
Input Voltage (Max)	100V	100V	100V	100V
Sensitivity	90 ±3dB (1W, 1M)	88 ±3dB (1W, 1M)	87 ±3dB (1W, 1M)	90 ±3dB (1W, 1M)
Cabinet Material	ABS	MDF	ABS	ABS
Dimensions (WxDxH) mm	175x230x310	182x184x270	195x213x310	190x200x335
Net Weight	2 Kg	3 Kg	3.7 Kg	2.9 Kg
Colour	Black/White	Black/White	Black/White	Black/White

Optional Brackets Available:

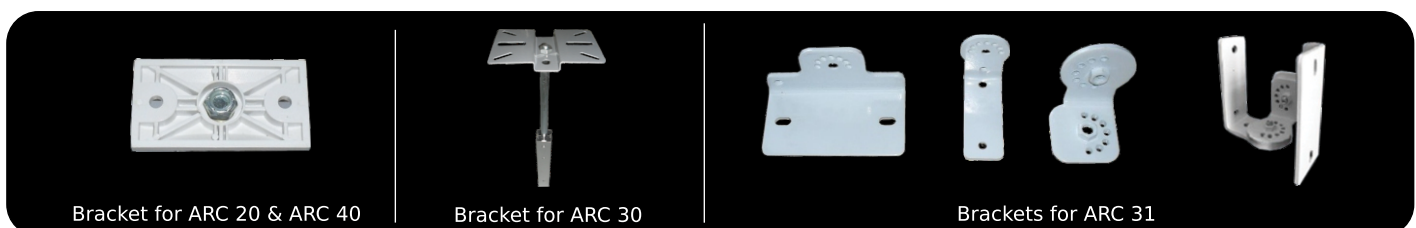

Standard adjustable brackets included in ARC 20, ARC 21, ARC 30 (for Single Speaker), ARC 40 & ARC 41