

AHUJA[®]

DJ Amplifier + Digital Player

UBA-800DP


- ✓ With MP3 Digital Player
- ✓ Cut Boost type Bass & Treble Controls
- ✓ Microphone and AUX Input
- ✓ Mains OVER-VOLTAGE & Thermal Protection Circuits



POWER PACKED PUNCH

ABSOLUTE VALUE FOR MONEY !

UBA-800DP DJ Amplifier + Digital Player

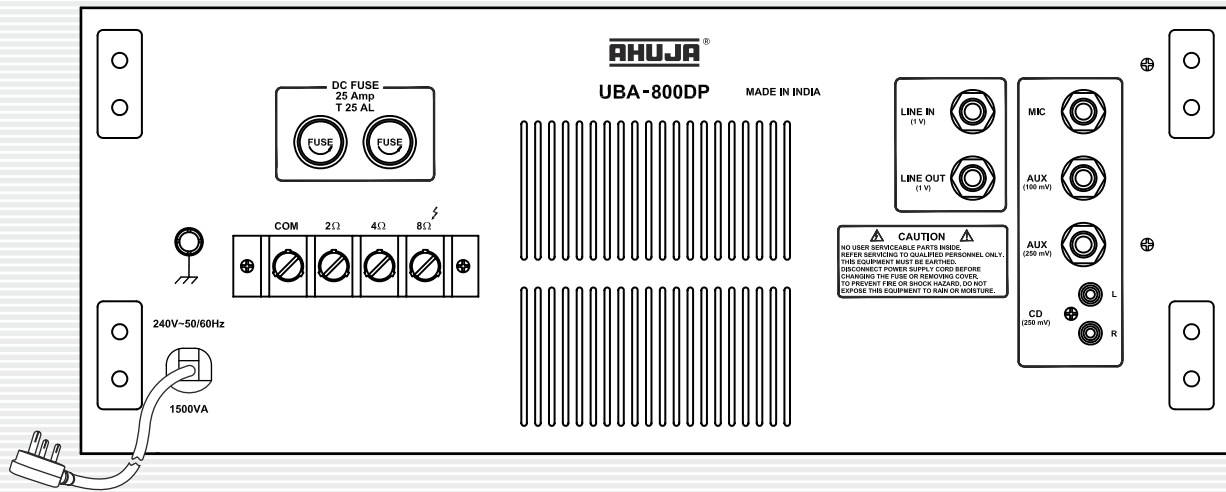

- Outstanding sound quality. Full spectrum bandwidth entirely suitable for use with the highest quality box speaker systems.
- Designed specially for use in music programmes, this amplifier provides unmatched reliability & ruggedness with the very best sound reproduction. Ideally suited for DJs.
- UBA-800DP is a 800 Watts amplifier which can be connected to various input sources like a Microphone, PA Mixer, DJ Mixer, CD Player, Cassette Player, Keyboard etc.
- The amplifier has cut and boost type tone controls which provides precise and accurate tonal setting of the programme.
- Line Input and Line Output have been provided to enable interconnections with other power amplifiers.
- Built-in Mp3 Digital Player with remote control.
- Circuit Protector Device has been provided which safeguards the amplifier against overload and short circuit.
- The amplifier has built-in protection against over voltage in AC mains supply while operating on a Genset.
- Indicator LEDs for Power, Signal, Temp, Overload and Fault conditions have been provided.

Power Output	1050W RMS Max. 800W RMS at 10%THD 750W RMS at 5% THD 700W RMS at 2% THD
Output Regulation	≤ 2dB no load to full load at 1kHz
Input Channels	1 × Mic 1mV / 4.7kΩ (Mic source impedance 50Ω to 1kΩ) 1 × Aux 100mV / 470kΩ 1 × Aux 250mV/20kΩ 1 × CD 250mV / 20kΩ Line Input 1V / 10kΩ
Digital Player	MP3 Player with Remote Control (USB, SD and MMC Card Reader)
Frequency Response	50Hz–18,000Hz ±3dB
Signal to Noise Ratio	60dB
Tone Controls	Bass (100Hz) : ± 8dB Treble (10kHz) : ± 8dB
Line Output	1V/1kΩ
Output Taps for Speaker Matching	2Ω, 4Ω & 8Ω
Power Supply	AC: 220-240V 50/60Hz
Protections	2 × 25 Amp fuse in ± DC supply 8 Amp circuit breaker in AC mains Protected against high AC mains voltage, overload and temperature
AC Power Consumption	1500 VA
Dimensions	W482 × H186 × D530 mm
Weight	32kg approx.

AHUJA is a registered trademark of Ahuja Radios in India and other countries. © Copyright Ahuja Radios, 2011. All rights reserved. Any unauthorized reproduction or use of logos, images or design elements is strictly prohibited by law. No part of the compilation may be reproduced in any manner or translated without written permission.

0K0000

TRUSOUND PVT. LTD.

C-89, Sector IV, Noida, Gautam Budh Nagar-201 301 (UP)
Regd. Office : 125E, Okhla Industrial Estate, New Delhi-110 020
Tel.: +91-120-4665665 Fax : +91-120-4665621 E-mail: trusoundsupport@airtelmail.in