

PS-500T 32 WATTS




- High fidelity 2-Way, 100V multi-purpose PA speaker system.
- 100V; Power taps of 32W, 16W, 8W.
- Facility to use as 8 ohms Low Impedance Speaker available.
- Power taps can be selected through an easily accessible rotary switch.
- Weather resistant speaker.
- Movable mounting bracket supplied, can be mounted in vertical or horizontal positions.

PS-400T 16 WATTS

- High fidelity 2-Way, 100V multi-purpose PA speaker system.
- 100V; Power taps of 16W, 8W & 4W.
- Power taps can be selected through a rotary switch.
- Facility to use as 8 ohms Low Impedance Speaker available.
- Weather resistant speaker.
- Movable mounting bracket supplied, can be mounted in vertical or horizontal positions.

PS-300T 10 WATTS

- High fidelity 2-Way, 100V multi-purpose PA speaker system.
- 100V, Power taps of 6W, 3W & 1.5W
- Power taps can be selected through rotary switch.
- Facility to use as 8 ohms Low Impedance Speaker available.
- Key hole for easy wall mounting.
- Threaded brass ferrule for stand mounting.

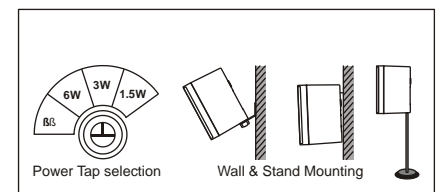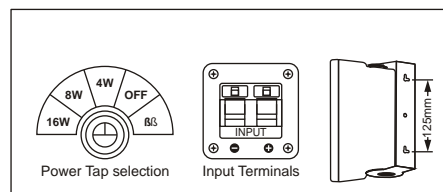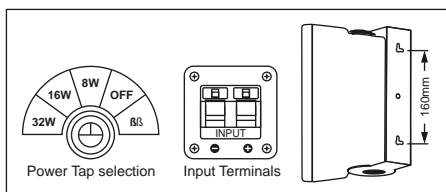

SPECIFICATIONS	PS-500T	PS-400T	PS-300T
INPUT POWER	32W RMS / 48W Max.	16W RMS / 24W Max.	10W RMS / 15W Max.
RATED VOLTAGE	100V	100V	100V
POWER TAPS ON 100V	32/16/8W	16/8/4W	6/3/1.5W
LOW IMPEDANCE	8Ω	8Ω	8Ω
FREQUENCY RESPONSE	80-20,000Hz	85-20,000Hz	150-20,000Hz
SPL (1W/1m)	87dB	86dB	86dB
SPEAKER	Woofer 125mm (5") Tweeter 13 mm dome	Woofer 95mm (3¾") Tweeter 13 mm dome	Woofer 75mm (3") Tweeter 13 mm dome
DIMENSIONS	W178 x H252 x D144 mm	W133 x H187 x D107 mm	W95 x H141 x D100 mm
WEIGHT	2.65kg approx.	1.40kg approx.	0.80kg approx.

Design and Specifications are subject to change without notice. • AHUJA is a registered trademark of Ahuja Radios in India and other countries.
© Copyright Ahuja Radios, 2006, reprinted 2008. All rights reserved. Any unauthorized reproduction or use of logos, images or design elements is strictly prohibited by law.
No part of the compilation may be reproduced in any manner or translated without written permission.