




Ahuja introduces a compact and versatile 8 channel audio splitter model DA-80 which splits a mono / stereo line level signal and distributes it to 4 × stereo / 8 × mono line level outputs. This audio splitter effectively overcomes the problem of signal loading which is encountered during cascading of a large number of PA amplifiers / boosters.

## Features

- Sleek and compact 8 channel line signal splitter.
- Designed for use in a wide variety of indoor and outdoor PA applications.
- Accepts Line Level Stereo as well as Mono inputs.
- Splitter provides four stereo outputs or eight mono outputs with a signal headroom of +25dB.
- Individual volume control for the input and eight output channels.
- Clip LED for optimum distortion free input levels.
- Operates on AC mains and 24V DC Car Battery.
- 19" rack mountable in 1U size and usable as a table top unit also.

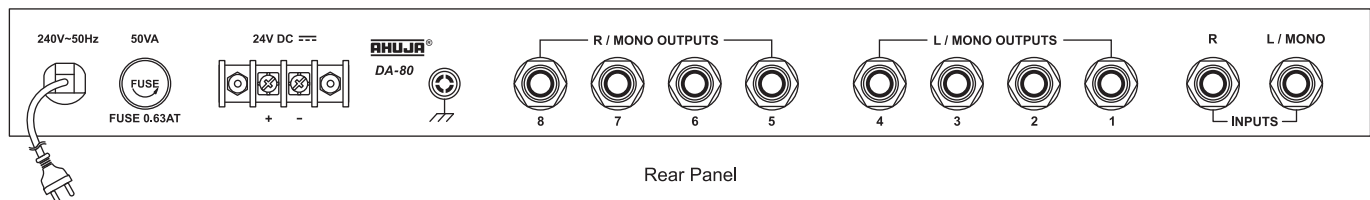

## Specifications

<b>Output Channels</b>	8 × 200mV / 470Ω (rated); 4.5V (max.)	<b>Indications</b>	Power ON LED Clip LED (4dB prior to true clip)
<b>Input Channels</b>	2 × 100mV / 47kΩ	<b>Power Supply</b>	AC: 220 - 240V 50 / 60Hz DC: 24V (2 × 12V Car Battery)
<b>Frequency Response</b>	20 – 20,000Hz	<b>Dimensions</b>	W483 × H43 × D178 mm
<b>Distortion</b>	0.1%	<b>Weight</b>	2.80kg approx.
<b>Signal to Noise Ratio</b>	70dB		

Design and Specifications are subject to change without notice. • AHUJA is a registered trademark of Ahuja Radios in India and other countries.  
© Copyright Ahuja Radios, 2005. All rights reserved. Any unauthorized reproduction or use of logos, images or design elements is strictly prohibited by law.  
No part of the compilation may be reproduced in any manner or translated without written permission.