

## ZONAL Paging



AHUJA introduces an aesthetically designed 6 zone Paging microphone which is technologically advanced and simple to use. It consists of a Paging Mic and a distribution unit interconnected by a 10mtrs. long shielded cable.


### Features

- Compact, elegant and stable housing.
- Paging mic has one-touch ON/OFF switches for zone and chime operation.
- Six zones selectable by individual switches.
- ALL CALL switch for selecting all the six zones together.
- RESET switch for switching off all the active zones.
- CHIME switch for relaying a multi-tone call attention chime.
- Status for each function (except RESET) is indicated by its LED.
- Slim and flexible 16" long gooseneck microphone with dynamic unidirectional cartridge housed in an elegant round grille.
- The distribution unit provides a Monitor Output and 6 Zone Outputs through ¼" phone jacks individually.
- Microphone and Chime signal levels can be adjusted by their respective volume controls which are accessible from the bottom side of the Paging Mic.
- Operates on 220-240V AC mains or 12V car battery.
- Distribution unit is 19" rack mountable in 1U space.





## Interconnections

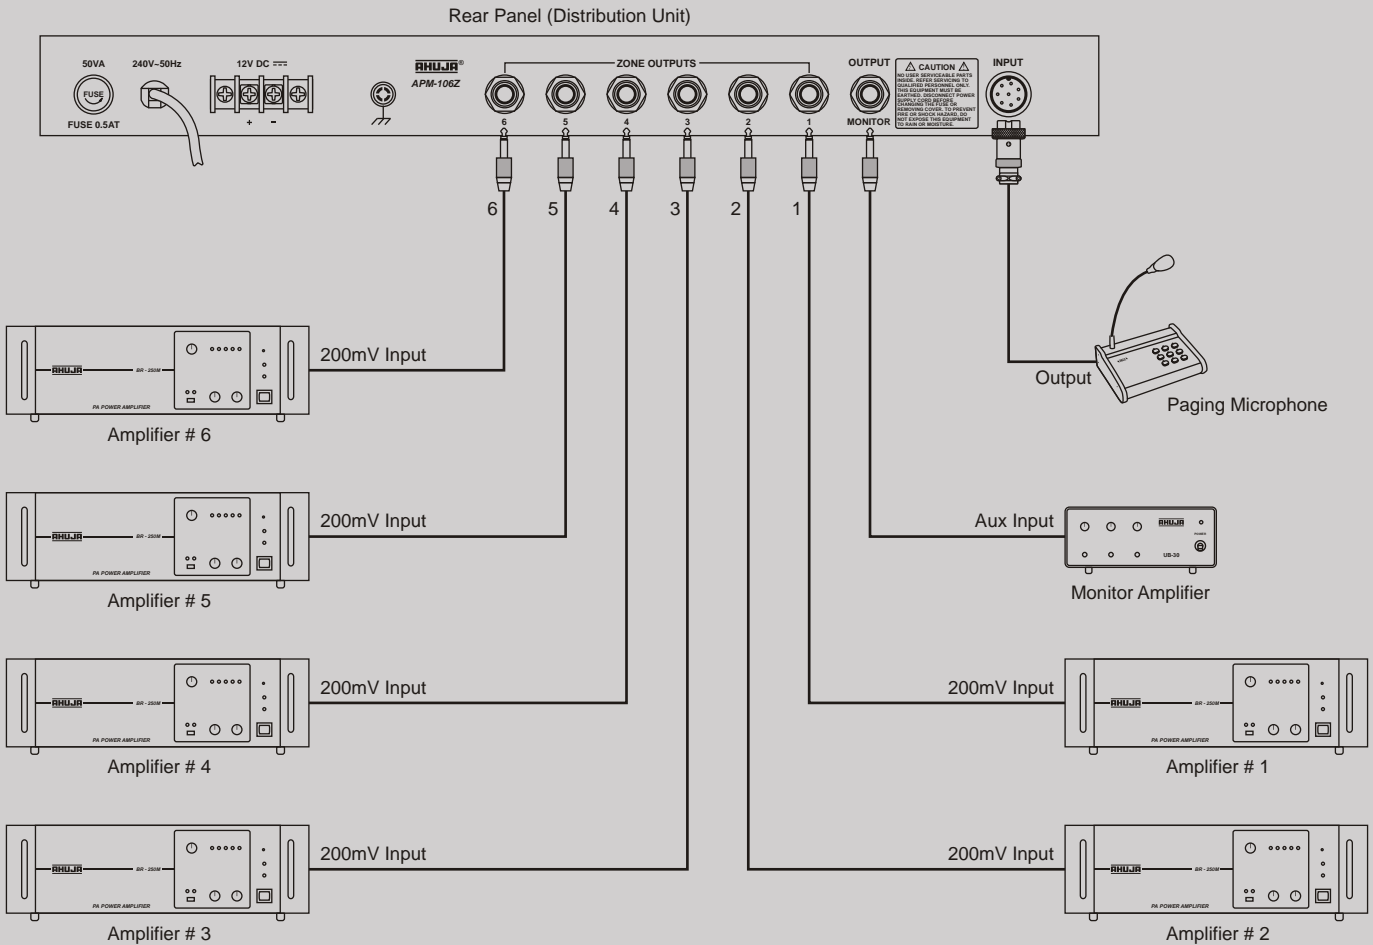

## Specifications

Output	250mV nominal (adjustable)	Dimensions	
(each zone & monitor output)		Paging Mic (Base)	W210 × H60 × D155 mm
Frequency Response	70-10,000Hz	Distribution Unit	W483 × H43 × D145 mm
S/N Ratio	> 60dB	Weight	
Power Requirement	AC: 220-240V, 50/60Hz	Paging Mic	1.05 kg approx.
	DC: 12V Car Battery	Distribution Unit	2.30 kg approx.
Protections	AC Fuse 1 × 0.5A	Accessories	2 × Fuses 0.5A, 1 × 10m interconnecting cable terminated with 8-pin connector on both ends
	DC Fuse 1 × 0.5A		

Design and Specifications are subject to change without notice. • AHUJA is a registered trademark of Ahuja Radios in India and other countries.  
 © Copyright Ahuja Radios, 2007. All rights reserved. Any unauthorized reproduction or use of logos, images or design elements is strictly prohibited by law.  
 No part of the compilation may be reproduced in any manner or translated without written permission.