

# AHUJA®

# PSX-600

## PA Powered Speaker



## 50 WATTS RMS



\* Operates on AC & 12V Car Battery


- 2 Microphone Inputs.
- Input for CD/Aux sources.
- Active Bass, Treble Controls & Master Control.
- Preamp Output for Recording of program or for connecting to additional Amplifiers for a Larger Gathering.
- Fitted with 2nos. Full Range Dual Cone 8" Speakers.
- Instant transfer to DC Power (12V Car Battery) if AC Power Fails.
- Stand mount adapter provided at the bottom.

## Multiple Applications

### Portable PA Combo... Musical Instrument Amp...

PSX-600 has a built-in power amplifier with multiple inputs for use in a wide variety of PA and Musical Instrument applications. Feature packed PSX-600 is an ideal equipment for small gatherings of around 80 people... Music and Vocal Performances, Conferences and Lectures, Presentations, Religious Discourses and Gatherings, Outdoor PA etc.



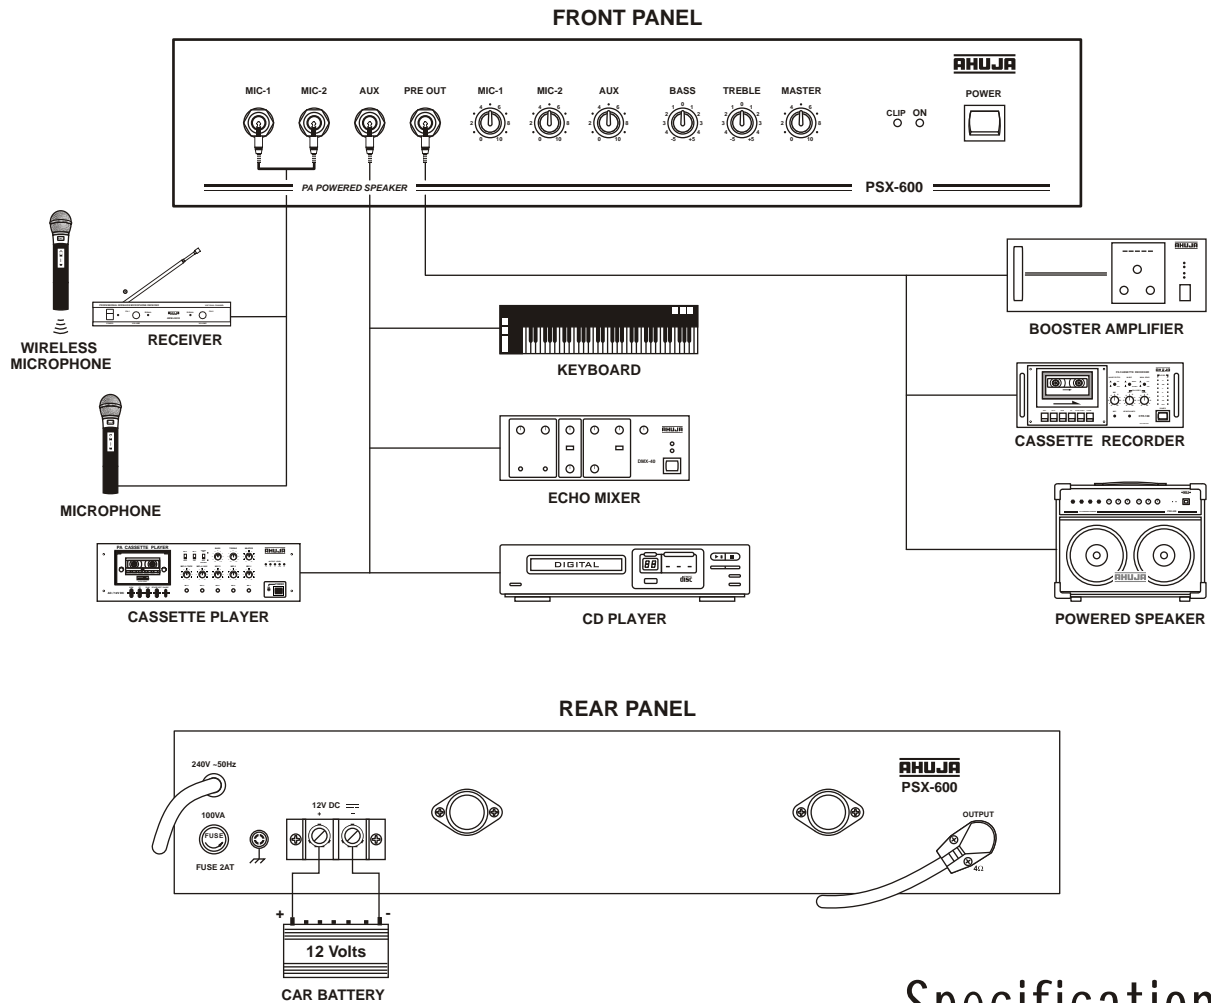

## Specifications

POWER OUTPUT	40W RMS at 1% THD 50W RMS at 5% THD
INPUT CHANNELS	2 × Mic 0.65mV/4.7kΩ (Mic source impedance 50Ω-1kΩ) 1 x Aux 100 mV/330kΩ
FREQUENCY RESPONSE	50-18,000Hz ±3dB
S/N RATIO	60dB
TONE CONTROLS	Bass: ±5dB at 100Hz Treble: ±5dB at 10kHz
PRE AMP OUTPUT	200mV/600Ω
PROTECTIONS	Fuse AC 2A, DC 8A
POWER SUPPLY	AC : 220V-240V 50/60Hz & 12V Car Battery
AC POWER CONSUMPTION	100VA
DIMENSIONS	W530 x H430 x D235 mm
WEIGHT	15.50 kg

### TRUSOUND PVT. LTD.

C-89, Sector IV, Noida, Gautam Budh Nagar-201 301 (UP)  
 Tel.: +91-120-2551452/53 Fax : +91-120-2553677  
 Regd. Office : 125E, Okhla Industrial Estate, New Delhi-110 020  
 Design and Specifications are subject to change without notice