


DJX 825 4-Channel DJ mixer

The DJX 825 is a high quality professional 4 channel DJ mixer from Studiomaster Professional.

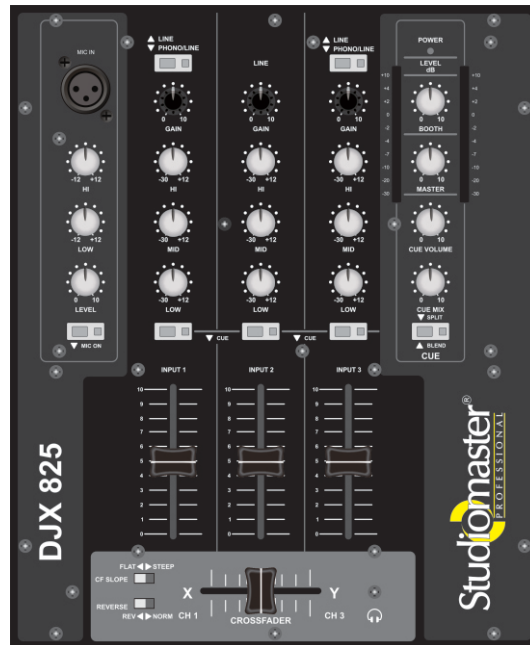

Features:

- 3-Band Kill EQ (-30 dB) & Gain control per channel.
- Balanced XLR MIC input with dedicated Gain & 2 Band EQ.
- Headphone Cue Mix with cue blend switch.
- Cross fader reverse / normal / Flat / Step curve switch.
- Separate Master, Record & Booth RCA output.
- Separate RCA output for master, Record & Booth
- Balanced XLR Master Output.
- Separate Master, Record & Booth RCA output.
- 6.35 mm (1/4") Headphone output with level control.

Technical Specifications:

Model	DJX 825
Gain (Mic/Line)	50dB/0dB
Input Level Sensitivity (Mic/Line)	-50dB/0dB
Main Output levels (Nominal/Max)	0dBu(0.775V)/ +18dBu(6.15V RMS)
Booth Output levels (Nominal/Max)	0dBu(0.775V) Nominal/ +18dBu(6.15V RMS) Max
Frequency Response	20Hz-22KHz (+/-3db)
Total Harmonic Distortion	0.07% @ 1KHz 0.1% @ 1KHz
Equalisation Line I/P (Treble/Mid/Bass)	+10/-12 dB @ 10KHz , +12/-24dB @ 1.3KHz , +12/-29dB @ 50Hz
Signal to Noise Ratio (Mic/Line)	60dB/82dB
Power supply	230V AC/50Hz
Dimensions (WxDxH in mm)	242 x 301 x 106
Net Weight (Kgs.)	3.3