


# PLAYMIX 300 3-Channel, Dual USB DJ Mixer

The Playmix 300 is a 3 channel DJ mixer from Studiomaster Professional with a Dual USB player.



0-9 Number Pad for Track Selection

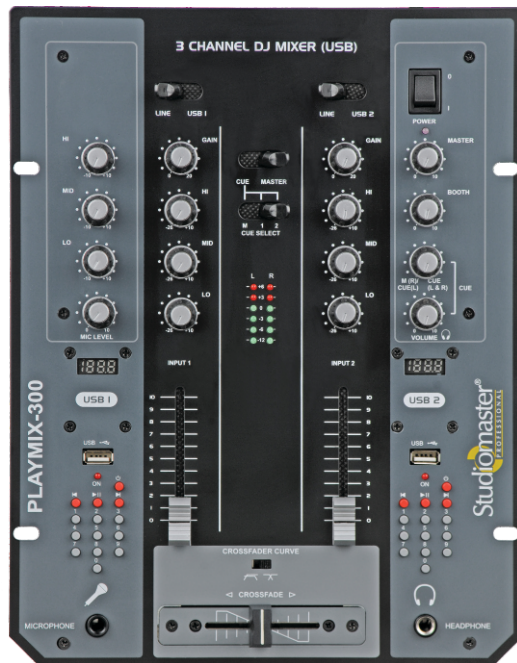

### Features:

- 3-band kill EQ (-26 dB) and Gain control per channel.
- +20dB gain to enhance performance.
- Monitor function with master/PFL mix option.
- 2 Built-In USB slots with digital LED display.
- USB Player, plays & display track numbers, upto 2000 MP3's
- Supports MP3 & WMA formats.
- On board Controls: Play, Pause, Prev/Next, 0 to 9 Number pad for direct track selection.
- Master & Booth outputs.

### Technical Specifications:

Model	PLAYMIX 300
Gain (Mic/Line)	57dB/0dB
Input Level Sensitivity (Mic/Line)	-57dB/0dB
Main Output levels (Nominal/Max)	0dBu(0.775V) / +17dBu(5.5V RMS)
Booth Output levels (Nominal/Max)	0dBu(0.775V) / +17dBu(5.5V RMS)
Frequency Response	20Hz-20KHz (+/-3dB)
Total Harmonic Distortion	0.05%
Equalisation Line I/P (Treble/Mid/Bass)	+10/-26 dB @ 10KHz/1.2KHz/50 Hz
Signal to Noise Ratio (Mic/Line)	55dB/75dB
Power supply	150V~240V AC/50Hz
Dimensions (WxDxH in mm)	250 x 320 x 84
Net Weight (Kgs.)	2.7